


Specifications >>

Model 210-4 SRA

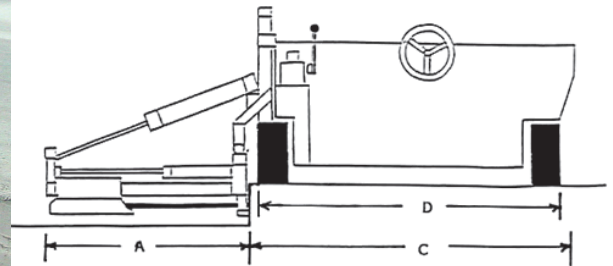

	Horizontal Position >>	Vertical Position >>
Lower Length (A)	47" (119.4 cm)	67 1/2" (171.5 cm)
Overall Length (A) + (C)	117" (297.2 cm)	91" (231.1 cm)
Cart Length (C)		70 " (177.8 cm)
Wheel Base (D)		58" (147.3 cm)
Width		60" (152.4 cm)
Height (E)	44" (111.8 cm)	Varies
Weight		2.200 lbs (998.8 kg)
Drill distance from corner	6" (15.2 cm)	N/A
Drill distance from ground	3" (7.6 cm)	up to 12" (30.5 cm)
Drill depth (std.)		18" (45.7 cm)
Drill bit diameter		5/8" to 2 1/2" (15.9 mm to 63.5 mm)
Distance from wheel to center of bit (F)	N/A	23 1/2" (59.7 cm)
Drill motor (pneumatic)		CP 32A
Weight		54 lbs (24.5 kg)
Chuck size (std.)		7/8" x 3 1/4" (22.2 mm x 82.6 mm)
Air consumption (minimum)		400 cfm (11.2 m3/min)
Operating pressure		90 psi (6.2 bar)
Impact (ft. lbs./blow)		36 fpb (49.0 J)
Blows/minute		2200 bpm
Rotations/minute		288 rpm

*Specifications subject to change without notice.