



LONG life
high end
ergonomic
SAVING MONEY
high IMPACT
Energy
created for you
born to be
wild
economical



Get the **App:**
BBG Smart Manual

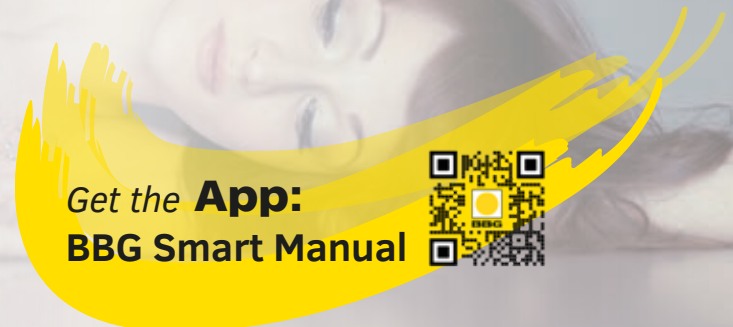

BBG Scalers
BBG Pneumatic spades

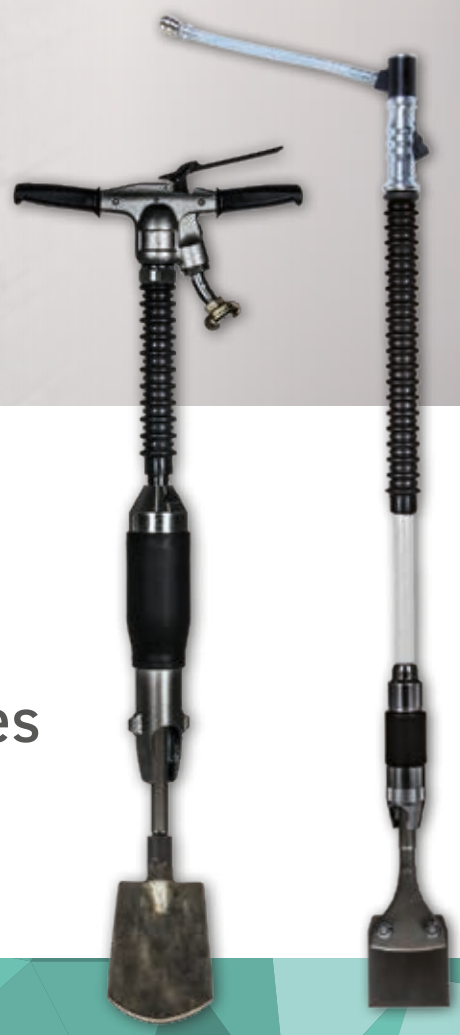



Select the product you need from our extensive range:













- Removal of interior, exterior and decor finery
- Removal of tiles in glue- and mortar bed
- Removal of all floor covers and glue remains


READY TO USE


- Breaking up masonry, concrete and screed
- Flaking of bitumen material and insulations
- Refurbishment of concrete- and sandstone walls
- Clean-up operations in rotary furnaces

Legend


	F D-handle
	T T-handle
	Handle
	K Open retainer cap
	Trigger protection
	L Light
	Vibration value
	Impact frequency
	Air consumption
	Impact energy

BS5 L




 4,5 $\frac{m}{s^2}$

Denomination	Shank size	Part no.	kg
BS5 LK	S19 x 50	4-000-000-05138	4,8 bis 5,2
BS5 LK Set	S19 x 50	4-000-000-05047	4,8 bis 5,2


 50,6 $\frac{1}{s}$


4,8 - 5,2

kg


 5,0 $\frac{1}{s}$

BS6




 4,5 $\frac{m}{s^2}$

Denomination	Shank size	Part no.	kg
BS6 K	S19 x 50	4-000-000-03325	6,2
BS6 K	S19 x 50	4-000-000-03326	6,6
BS6 K	S19 x 50	4-000-000-03327	6,9
BS6 FK	S19 x 50	4-000-000-04926	6,8
BS6 FK	S19 x 50	4-000-000-04927	7,1
BS6 FK	S19 x 50	4-000-000-04928	7,4


 50,6 $\frac{1}{s}$


6,2 - 7,4

kg


 5,0 $\frac{1}{s}$

BS9




 7,1 $\frac{m}{s^2}$

Denomination	Shank size	Part no.	kg
BS9 TK	S22 x 82,5	4-000-000-04929	12,8
BS9 TK	S22 x 82,5	4-000-000-04930	13,1
BS9 TK	S22 x 82,5	4-000-000-04931	13,5

 26,6 $\frac{1}{s}$

12,8 - 13,5

kg

 10,6 $\frac{1}{s}$



READY TO USE.

Removal of interior, exterior and decor finery.
Removal of tiles in glue- and mortar bed.
Removal of all floor covers and glue remains.
Breaking up masonry, concrete and screed.
Flaking of bitumen material and insulations.
Refurbishment of concrete- and sandstone walls.
Clean-up operations in rotary furnaces.

JUST WHAT YOU'RE LOOKING FOR.

No easy choice? No problem at all.
Just give us a call!
We will be happy to assist you -
and help you find the product
that best meets your needs!

Anything is possible -
ask us about customized solutions!

QUALITY TO GO, PLEASE!

Does quality matter to you?
It does to us too! That is why
we are ISO 9001-certified.

ALWAYS IN TOP SHAPE.

Our hammers are always
kept up-to-date, which means
they comply with the provisions
of the applicable Machinery Directive!



trigger protection

ergonomically designed handles

low air consumption

forged + galvanized


high quality steel

silenced

high output





Scaler BS5 L



SHANK SIZE

S19 x 50

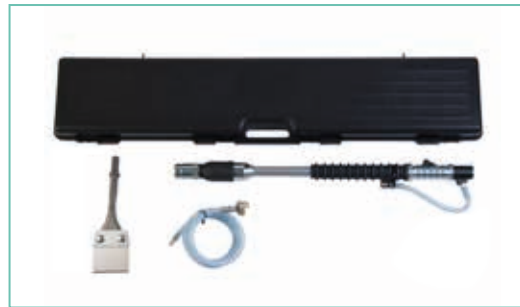

24 hours

Your delivery capability is important to us too, which is why we ensure that the parts you have ordered leave our warehouses within 24 hours!

Denomination		BS5 LK
Weight	kg	4,8 - 5,2
Silencer		•
D-handle		-
T-handle		-
Handle		•
Trigger protection		•
Vibration reduced		-
Vibration value*	m/s ²	4,5
Noise level	dB(A)	103
Length	mm	500 - 1200
Piston diameter	mm	22
Piston stroke	mm	58
Impact frequency	1/s	50,6
Air consumption	l/s	5,0
Operating pressure	bar	6
Impact energy	J	5
Power to weight ratio	W/kg	52,7 - 48,7
Connection thread		-
Shank size		S19 x 50
Retainer system		open retainer cap
Suitable lubricator		SO 16, SO 16M, OR 40

*The vibration levels were identified acc. to EN ISO 28927-10

Easy on OPERATORS AND MATERIALS

On a daily basis, the operator of an air hammer on a construction site is subject to vibrations.

How can these vibrations be reduced?

The upper air buffer decelerates the piston on the return stroke, preventing impact on the handle. In the lower buffer area, the idle impact energy is reduced which then substantially preserves the cylinder.




The advantage to you:

It's easy on the operator of the hammer and on the hammer itself!



Scaler BS6



FORGED FOR

long life

*A customer came to the door wanting spare parts.
For a BBG hammer.*

One he inherited from his father.

Can that even happen? - It can at BBG!

How can a hammer work for so long?

The handles on our hammers are forged from the highest quality special steels - guaranteeing strength and stability.

Quality makes sense.

BBG hammers for the ages.

Denomination		BS6 K	BS6 FK
Weight	kg	6,2 / 6,6 / 6,9	6,8 / 7,1 / 7,4
Silencer		•	•
D-handle		•	•
T-handle		-	-
Handle		•	-
Trigger protection		•	•
Vibration reduced		-	-
Vibration value*	m/s ²	4,5	4,5
Noise level	dB(A)	103	103
Length	mm	890 - 1190	800 - 1100
Piston diameter	mm	22	22
Piston stroke	mm	58	58
Impact frequency	1/s	50,6	50,6
Air consumption	l/s	5,0	5,0
Operating pressure	bar	6	6
Impact energy	J	5	5
Power to weight ratio	W/kg	40,8 / 38,3 / 36,7	37,2 / 35,6 / 34,2
Connection thread		NW10	NW10
Shank size		S19 x 50	S19 x 50
Retainer system		open retainer cap	open retainer cap
Suitable lubricator		S016, S016 M, OR40	S016, S016 M, OR40


*The vibration levels were identified acc. to EN ISO 28927-10





STORAGE COSTS?
Minimal!

Our modular system has enabled us to create *one* chipping tool sleeve for *several* different types of hammers!

SHANK SIZE

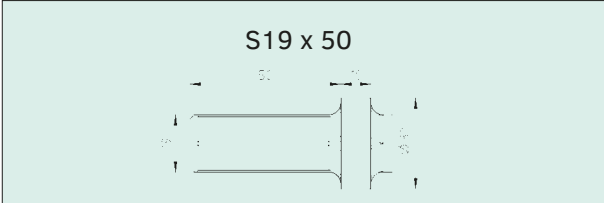


Pneumatic spade BS9



SHANK SIZE

S22 x 82,5



**DO YOU REMEMBER
HOW IT WAS LAST**

Century?

In France of 1919, André Gustave Citroen founded one of the most important companies in the automotive industry.

At the same time, the first BBG hammers were being produced by the Gebrüder Böhler Co AG Company in its pneumatic hammers division!



Denomination		BS9 TK
Weight	kg	12,8 / 13,1 / 13,5
Silencer		•
D-handle		-
T-handle		•
Trigger protection		•
Vibration reduced		-
Vibration value*	m/s ²	7,1
Noise level	dB(A)	105
Length	mm	735 - 935
Piston diameter	mm	35
Piston stroke	mm	130
Impact frequency	1/s	26,6
Air consumption	l/s	10,6
Operating pressure	bar	6
Impact energy	J	34
Power to weight ratio	W/kg	70,6 / 69,0 / 66,9
Connection thread		G3/4"
Shank size		S22 x 82,5
Retainer system		open retainer cap
Suitable oiler		SO16, SO16 M OR40


*The vibration levels were identified acc. to EN ISO 28927-10

OUR world OUR environment

is where our thoughts are. Protecting our environment and living sustainably is a vital part of our corporate philosophy. The construction of our company facilities enabled us to successfully introduce environmental compatibility while at the same time reducing costs by saving energy with heat recovery.

We love bright colors and green is especially close to our hearts.








Lubricator S016 S016 M OR40

*The automatic
switch-off function*

... prevents the hammer
from continuing in a dry
operation on an empty
oiler and stops a whip
stroke from occurring
in the case of a hose
rupture.

Thanks to the automated operational
pressure reduction with S016 M excessive
strain of the hammer is no longer possible
and work can always be done with the perfect
degree of efficiency.

Denomination		S016	S016 M	OR40
Item no.		4-000-000-04678	4-000-000-04695	2-000-000-00579
Weight	kg	6,0	6,2	10,0
Length	mm	370	440	-
Oil capacity	l	1,4	1,4	4,0
Max. operating pressure	bar	9,0	9,0	10,0
Reducing valve, adjustable		-	•	-
Lubricator legs		1-000-000-84728	1-000-000-84728	-
Automatic power-off		•	•	-
Air flow rate in the idle mode	l/min at 5 bar l/min at 6 bar	3.400 4.000	3.400 4.000	-
Connection thread		G 1 ", G 1 1/4 "	G 1 ", G 1 1/4 "	-
Connection thread with reducing valve		2 x G1 "	2 x G1 "	-

Smooth RUNNING!

A hammer works at its best if it is constantly lubricated.

What ensures constant hammer lubrication?



The innovative line lubricators S016 and S016 M from BBG are permanent lubricators that guarantee constant hammer lubrication.

Thanks to an adjustable oil flow, these exceptional lubricators adapt to every weight class of hammers there is. The robust design guarantees an especially long service life!

S016 & S016 M:

Flow rate of oil
in the default setting:


BM4 2,39 ml/h
BA13 3,64 ml/h

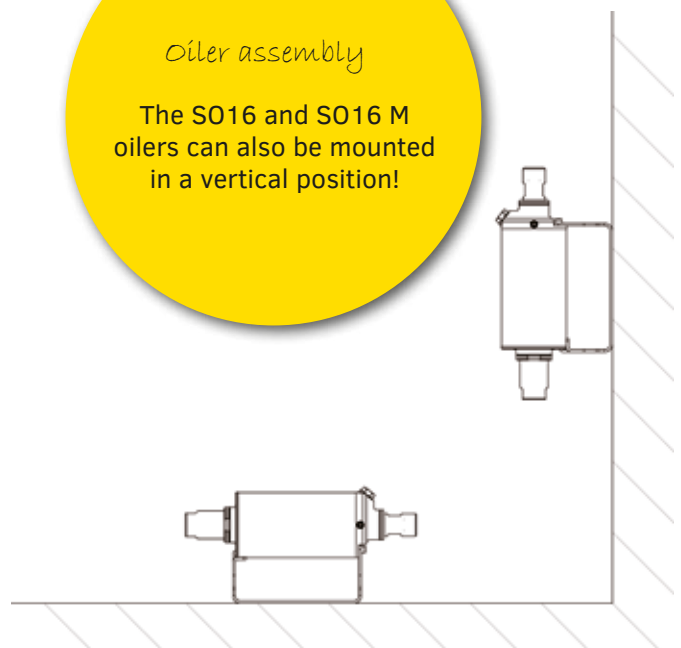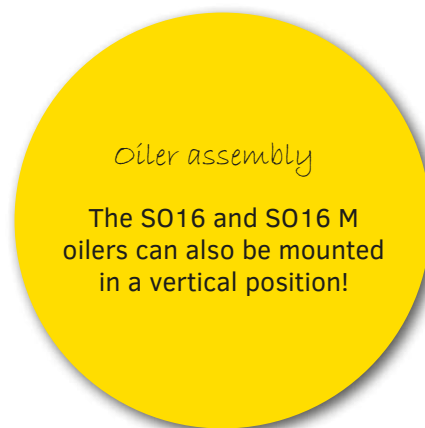



At your service.
All over the world.



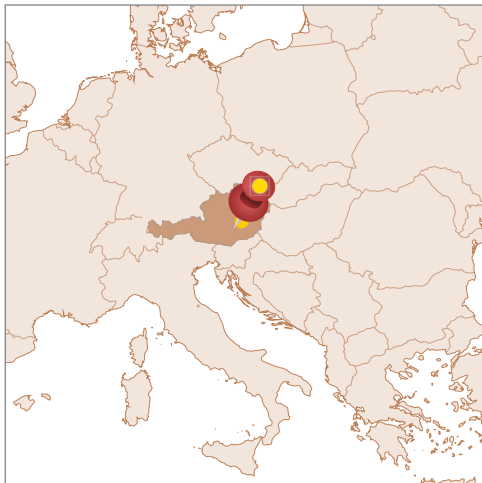

Corporate Headquarters
Kapfenberg, Austria
BBG Baugeräte GmbH



Questions? Just give us a call!

Johann Pfeffer
Engineer

Sales International
j.pfeffer@bbg-gmbh.at
+43 (0) 664 / 212 30 51

Udo Rademacher
Graduate of Economics

Sales Germany
u.rademacher@bbg-gmbh.at
+49 (0) 173 / 579 79 74

HAVE YOU HEARD ABOUT OUR

Trigger protection?



NO MORE unintentional starts!



BBG Baugeräte GmbH
High-Tech-Park West 6 • A-8605 Kapfenberg
office@bbg-gmbh.at • www.bbg-gmbh.at
☎ +43 (0) 3862 / 304 - 0
📞 +43 (0) 3862 / 304 - 910

Your dealer