

HYCON HWP3 SUBMERSIBLE PUMPS



PRODUCT FEATURES

The HWP3 water pump weighing only 11 kg has a capacity up to 85 m³/h per hour making it extremely powerful compared to weight.

Even though a 3" pump, the outside diameter is only 30 cm making it suitable for many applications, even in narrow spaces. The VORTEX design ensures long lifetime and no downtime even in the demanding construction business. It will work all day every day, because of the Hydraulic direct drive motor that will make sure that the pump can run dry without damage to the motor or seals.


*PLEASE NOTE: 10 m. Discharge Hose Kit (incl. 3" BSP Male coupling) is not included in the pump.

HYCON HWP3 PERFORMANCE CURVE

HYDRAULIC SUBMERSIBLE PUMP HWP3

Item no. HWP3 - Standard. Strainer*	3030003
Item no. HWP3 - Fine Strainer*	3030003-01
10 m. discharge hose kit incl. 3" BSP Male coupling.	4032698
Weight, kg	11
Oil Flow, lpm	20-30
Max pressure, bar	172
Capacity, m ³ /h	85
Max head, m	20
Max solids - Standard Strainer, mm	ø63
Max solids - Fine Strainer, mm	ø10
Outlet	3" BSP

3" Submersible Pump

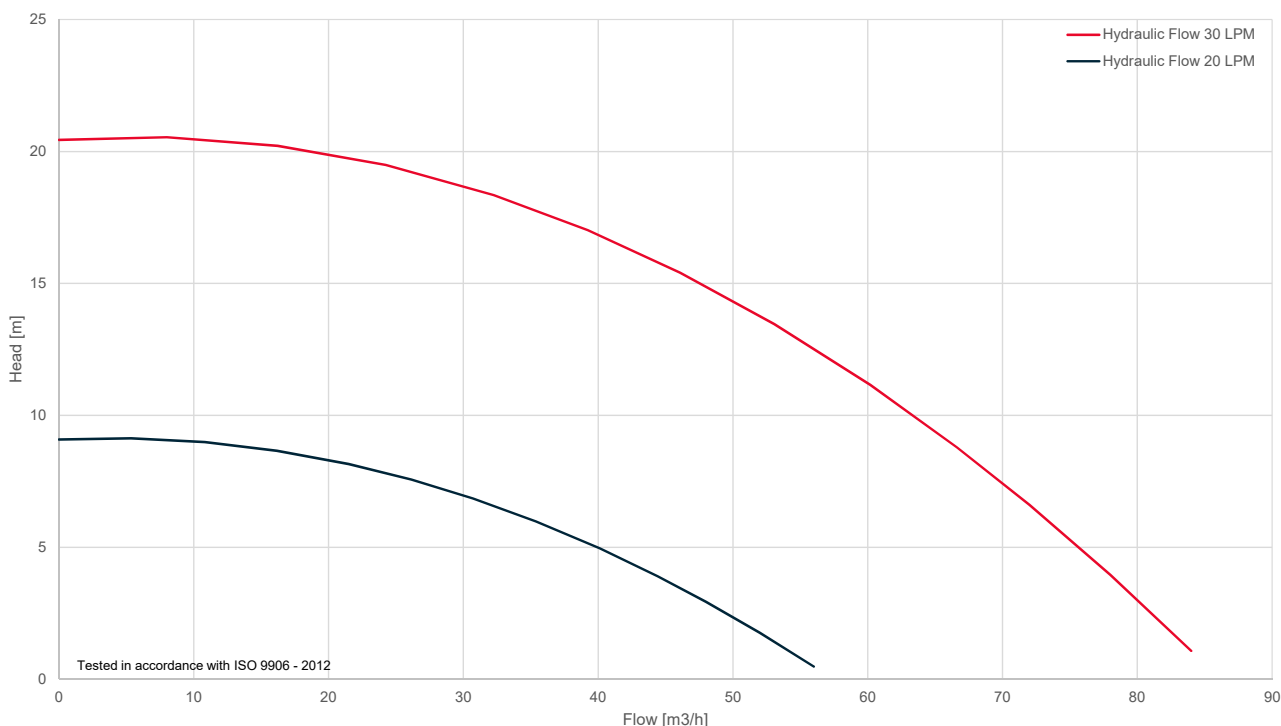

Contact us for more information:
hycon@hycon.dk / +45 96 47 52 00

THE HYCON PRODUCT RANGE

CUT-OFF AND RING SAWS • CORE DRILLS • POST DRIVERS • PICK HAMMER • LIGHT & HEAVY DUTY BREAKERS
SUBMERSIBLE PUMPS • ROCK DRILLS • UNDERWATER EQUIPMENT • GASOLINE, DIESEL AND ELECTRIC POWER PACKS



HYCON A/S
Juelstrupparken 11
DK-9530 Støvring

Tel +45 9647 5200
Fax +45 9647 5201
www.hycon.dk

DISTRIBUTOR: