

HYCON OIL FLOW DIVIDER HFD




PRODUCT FEATURES

The HYCON HFD Oil flow divider replaces the need for power packs and is perfect to drive all HYCON tools on worksite where there already is an hydraulic machine like an backhoe, skidsteer or mini-excavator in place.

Simply connect the preset HFD to the Hydraulic Power Take Out (PTO) and you are assured correct flow, pressure and rotation on saws, pumps and other tools needed on the jobsite.

The HYCON oil flow divider has 3 built-in functions:

1. Output oil flow control by the build in flow regulation valve
2. Maximum tool working pressure ensured by a pressure relief valve
3. Ensures the correct oil flow direction by a check valve.

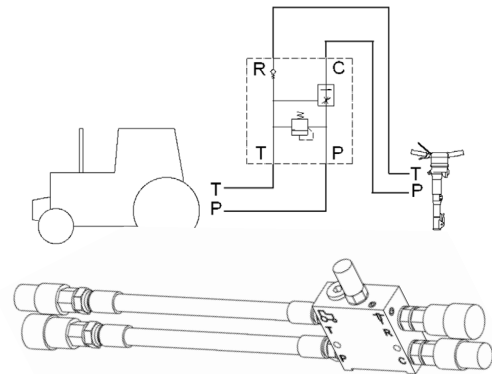

The HYCON HFD comes with:

- 0.3 m hose and quick release coupling
- Replacable restriction for 20, 30 or 40 l.p.m.
- Solid and robust aluminium casing

Oil Flow Divider - Item no. 3030060

Overload protection for tool connected to an alternative hydraulic power source.

Max. oil flow in:	80 l.p.m.
Oil flow out:	20, 30 or 40 l.p.m./max. 160 bar
Pressure relief valve (power source)	Max. 240 bar
Pressure relief valve (adjustable)	160 bar



THE HYCON PRODUCT RANGE

CUT-OFF AND RING SAWS • CORE DRILLS • POST DRIVERS • PICK HAMMER • LIGHT & HEAVY DUTY BREAKERS
SUBMERSIBLE PUMPS • ROCK DRILLS • UNDERWATER EQUIPMENT • GASOLINE, DIESEL AND ELECTRIC POWER PACKS



HYCON A/S
Juelstrupparken 11
DK-9530 Støvring

Tel +45 9647 5200
Fax +45 9647 5201
www.hycon.dk

DISTRIBUTOR: